




HaoTian Fence


temporary fence

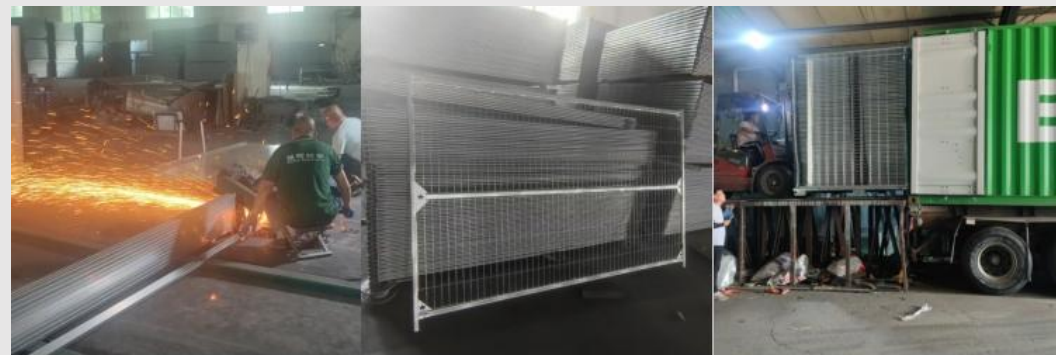

HaoTian is committed to be the most reliable and efficient partner



Dimensions	6' x 8' ,6' x 10',6' x 9.5',8' x 9.5',8.2' x 8' ,8.2' x 9.5',6.2' x 8'
Wire diameter	4.0, 6.0 mm optional.
Mesh opening	50X100,50X150,75X150mm
Frame	30X30X2mm,40X40X2mm
Middle horizontal pipe	25X25X2mm
color	Dark green,yellow,red,blue,other RAL color
Surface treatment	Hot dipped galvanized or powder coated

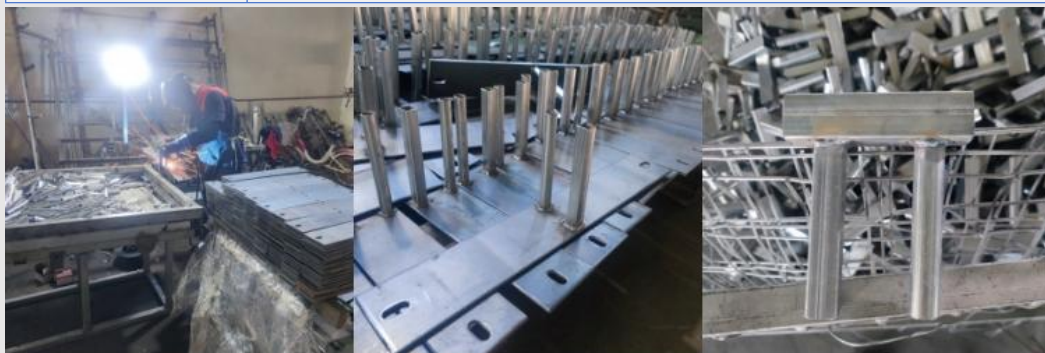

All accessories are produced by the factory



Australia temporary fence	
Panel Size	2400 × 2100 mm, 2650 × 2100 mm, :3300 × 2100 mm, etc
Frame Size	32 mm O.D. × 1.5 mm thickness, 32 mm O.D. × 2.0 mm thickness
Infill Mesh	3 mm horizontal, 3 mm vertical; 4 mm horizontal, 4 mm vertical
Aperture Spacing	150 mm × 60 mm spacing
Surface Treatment	Hot-dipped galvanized 90 microns




Temporary chain link fence	
Dimensions	6' × 8', 6' × 10', 6' × 12', 6' × 14', 8' × 10', 8' × 12'
Frame O.D	1.25", 1.5", 1.6" round optional
Wire diameter	9, 10.5, 11, 11.5, 12 gauge optional
Mesh opening	2", 2.25", 2.4", 2.75" optional
Brace	Cross, vertical, horizontal brace with 1" round or the same with frame O.D.
Surface treatment	Hot dipped galvanized

Fence feet	Square fence feet	36" × 13.75" × 20", 30" × 18" × 20" optional.
	Oval fence feet	36" × 13.75" × 20", 30" × 18" × 20" optional.
	Flat fence feet	23.6" × 4.3" × 0.3", 35.4" × 3.0" × 0.25" optional



High corrosion resistance

hot dipped galvanized and sprayed with anti-rust paint



Abundant stock

Having a large inventory year-round to meet market demand



Durable and sturdy

Tie wires are tightly wrapped around the panel frame by tension bars and tension bands



applicable scenarios

Provide a visual barrier. E.g. construction sites, accidents scene, etc.

Address	Heping Road, Anping, Hebei, China
TEL	Tel: +86-318-8062221/8062223 Fax: +86-318-8062999
EMAIL	Email: sales@skynetting.com Email: info@skynetting.com